UNE115 - NIPPLE INSERTER & EXTRACTOR



Figure: Safety guarded components and freely positional foot pedal.

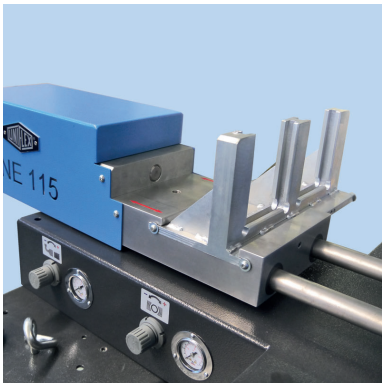


Figure: Rapid tool sled with pre-installed fork sets.

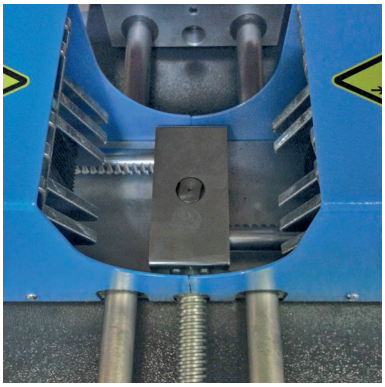


Figure: Safety guarding for the clamping unit.

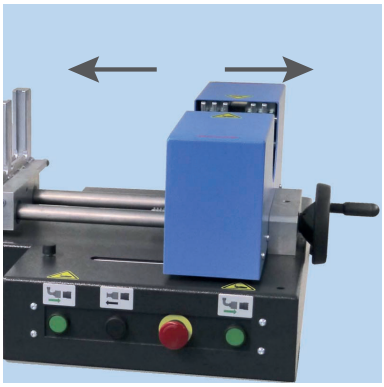


Figure: Axially adjustable clamping unit prevents kinking of thin hoses.

Technical data	
Hose size	0-3“
Extenal OD	Ø 120 mm
Compressed air	8 bar
Insert force	8 kN (8 bar)
Clamp force	8 kN (8 bar)
Control	Tasten/ Fußpedal
L x B x H (mm)	625 x 1185 x 320
Gewicht	100 kg


Model	
UNE115	7bar/ 100PSI

Zubehör	
TU	Workbench
778.2	Set Hart rubber casters (4 piece) inclusive two with locking brake

Technische Änderungen vorbehalten. / We reserve the right to make technical changes without notice.

UNE115 - NIPPLE INSERTER & EXTRACTOR

A tool for two functions: The new UNE 115 is the high-performance tool for production and the workshop. This equipment now permits fittings up to 3" to be inserted or extracted. Due to its innovative rapid tool sled, the insertion of 90 degree, 45 degree or straight fittings without changing tools is now simple and quick.

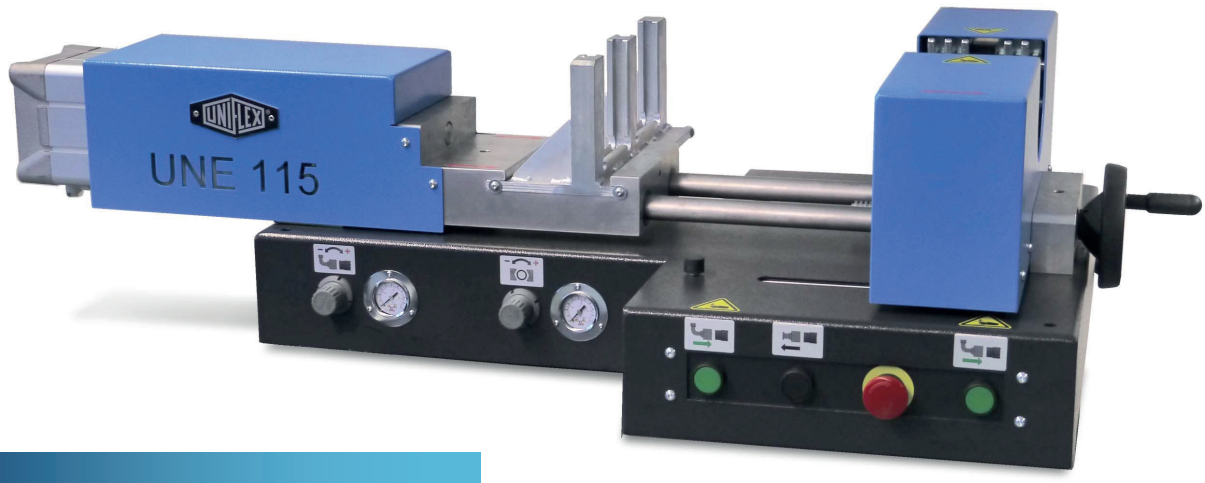

Ergonomic

Freely positional foot pedal for clamping hose saves time and increases productivity

Lifting eyes for easy positioning of the machine

Simple to use

Universal hose clamping jaws for all hose diameters without the need for changeover eliminates lengthy setup times

Axially adjustable clamping unit for all diameters prevents kinking of thin hoses and for efficient operation

Individual clamping force adjustment for damage-free clamping avoiding scrap

Zero maintenance and wear contributes to cost savings

Rapid sled for inserting curved and straight fittings without time-consuming exchange of fork sets saves time

Safety compliant

Moving components have safety guarding

CE-compliant, robust UNIFLEX quality



Image shows optional configuration with table and casters